

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 February 2005 (24.02.2005)


PCT

(10) International Publication Number  
**WO 2005/017921 A1**


- (51) International Patent Classification?: **G21C 21/02**
- (21) International Application Number:  
**PCT/BE2003/000135**
- (22) International Filing Date: 13 August 2003 (13.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **BELGO-NUCLEAIRE SA** [BE/BE]; Avenue Ariane 4, B-1200 Bruxelles (BE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **AERTS, Louis** [BE/BE]; Rollekens, 53, B-2400 Mol (BE). **VAN-DEGHEYNST, Alain** [BE/BE]; Rue de l'Yser 40, B-7370 Dour (BE). **HEYLEN, Jean** [BE/BE]; Groot Kapellen, 17, B-2400 Mol (BE).
- (74) Agents: **CLAEYS, Pierre et al.**; Gevers & Vander Haeghen, Holidaystrat, 5, B-1831 Diegem (BE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH (utility certificate), GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG (utility certificate), US, UZ, VC, VN (patent for utility solution), YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SEALING DEVICE FOR THE OUTER SURFACE OF A NUCLEAR FUEL CLADDING

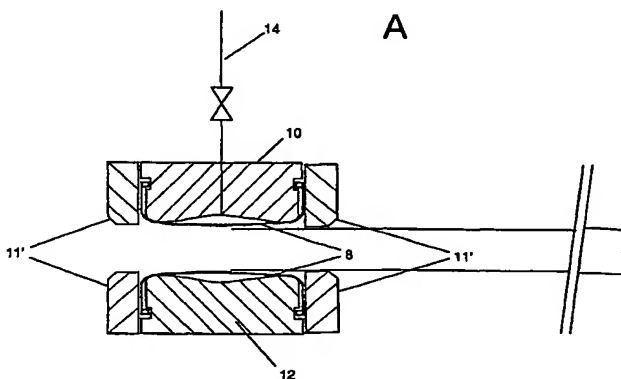

(57) Abstract: Sealing device (10) between two media and the outer surface of a fuel cladding (1), characterized by three states: a state retracted for contactless axial insertion of said fuel cladding (1) through the sealing device, a state statically hermetically sealed around said fuel cladding maintained at rest, and a state dynamically hermetically sealed around said fuel cladding under axial and/or rotational movement.

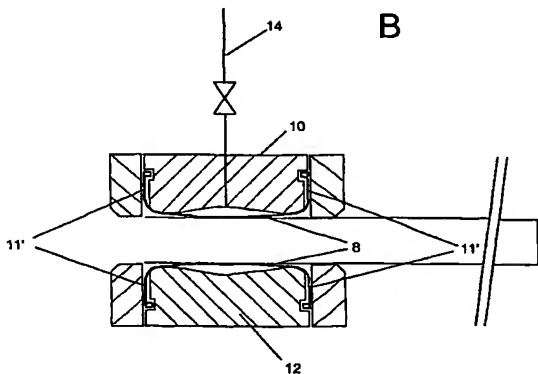

WO 2005/017921 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*